

10 years of professional production of PVC floor
Cooperate with us to solve all your needs



Importaciones
Josver

Company Introduction

120+ Countries Range

300+ Container Export/Year


30% Sales Increase Rate/Year



60+ Global customers

100%Professional

Glue down

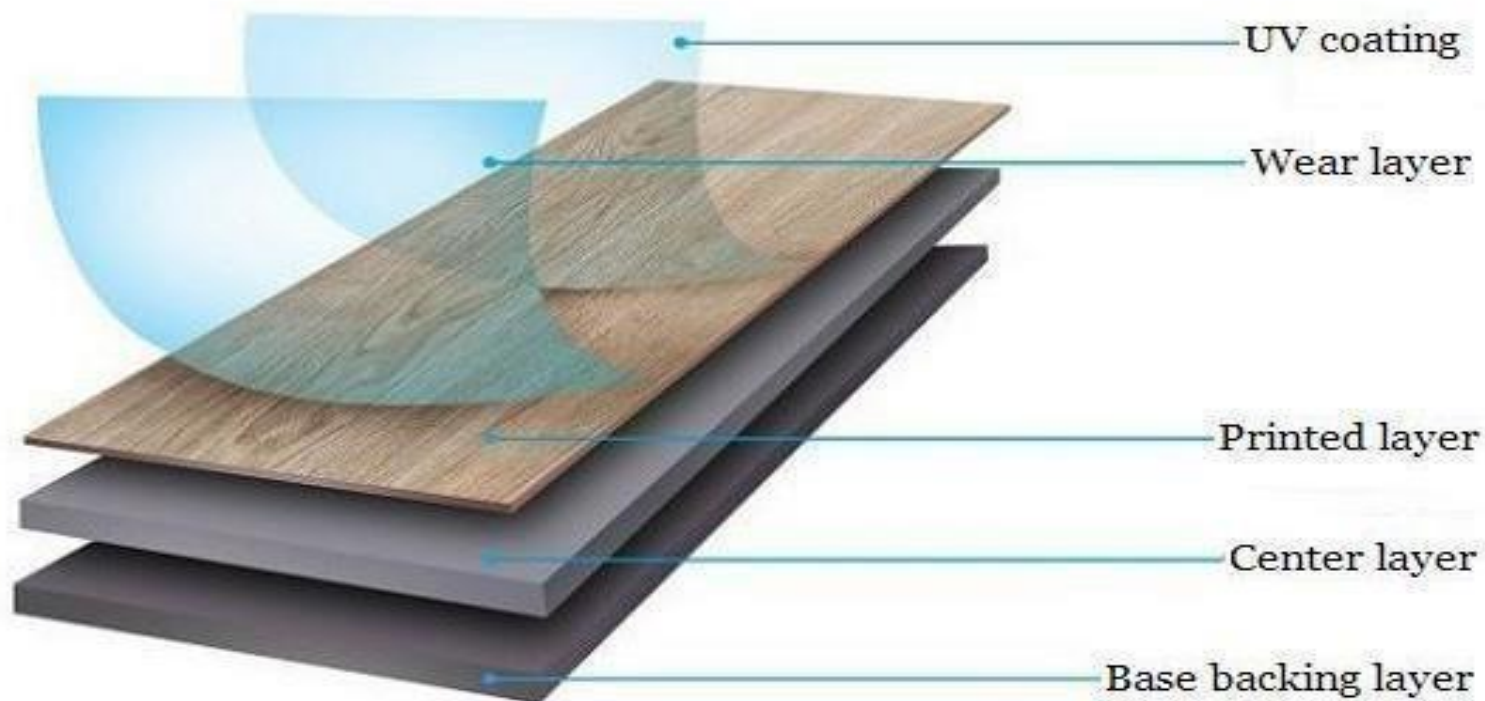

Dry back



Waterproof



Anti-fire



Easy cutting



Anti-scratch





Easy installation

01
scratch-resistant
OPTIDE II SC

02
Anti-fire
FIRE RETARDANT

Self adhesive

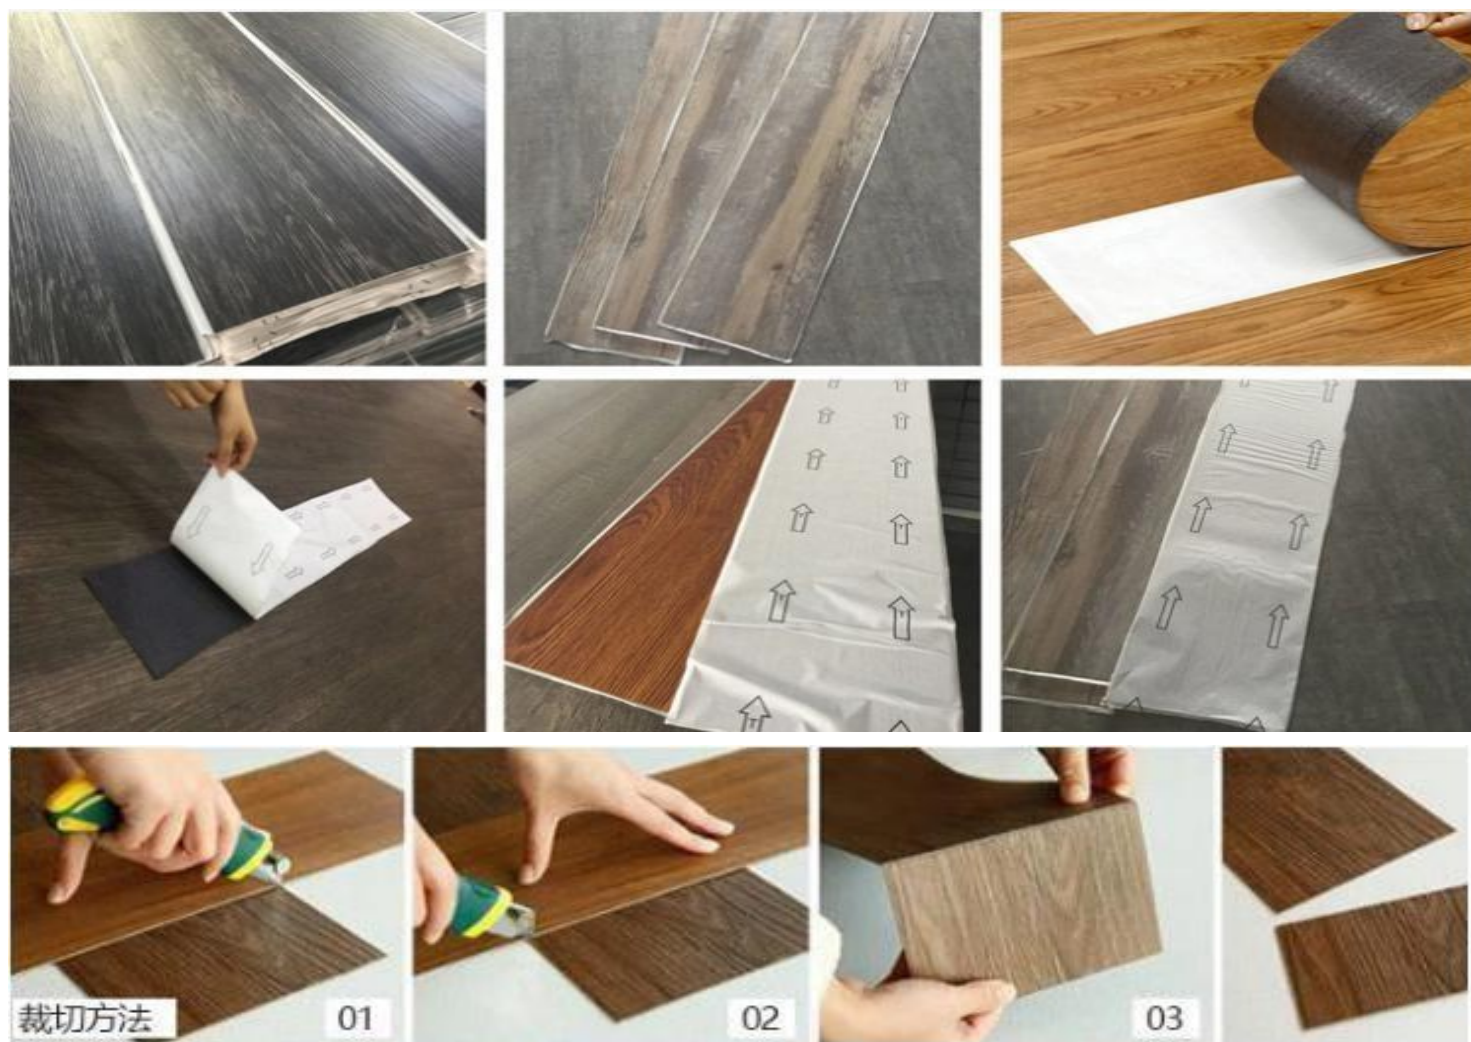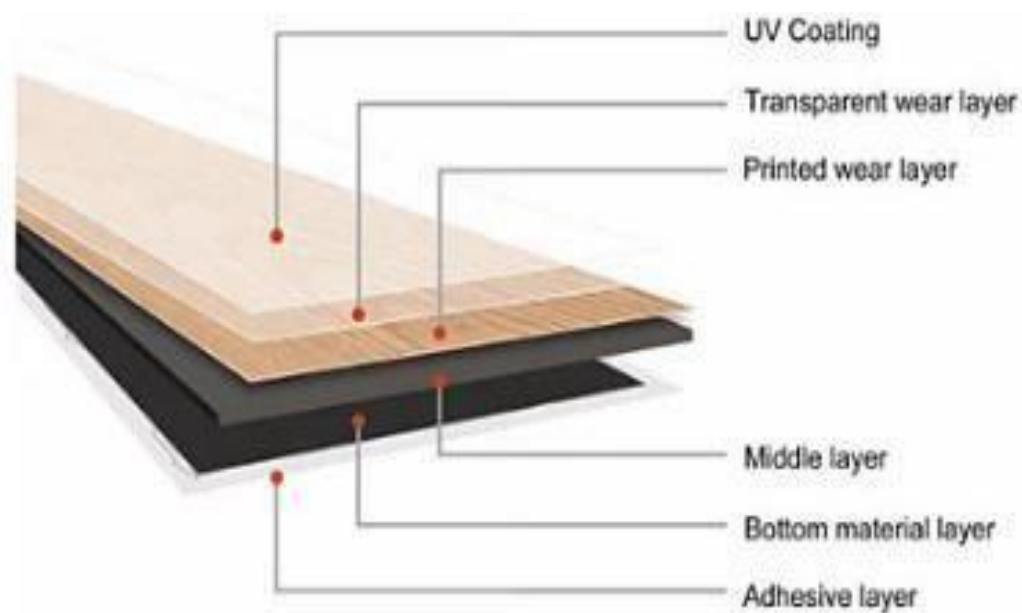

Specification

For dry back

Size	3"*36,4"*36,6"*36,9"*36,9"*48,12"*12",18"*18",18"*36",
Thickness	1.2mm,1.5mm,1.8mm.2.0mm,2.5mm,3.0mm,
wearlayer	0.07mm,0.1mm 0.15mm,0.2mm,0.25mm,0.3mm,0.5m
Base material	Recycled material or 100%virgin material
Surface Finish	UV coating(semi-matt,high gloosy)
Surface Textures	Embossed,smooth,deep wood grain
Installation	glue needed

For Self adhesive

Size	3"*36,4"*36,6"*36,9"*36,9"*48,12"*12",18"*18",18"*36",
Thickness	1.2mm,1.5mm,1.8mm.2.0mm,2.5mm,3.0mm,
wearlayer	0.07mm,0.1mm 0.15mm,0.2mm,0.25mm,0.3mm,0.5mm
Base material	Recycled material or 100%virgin material
Surface Finish	UV coating(semi-matt,high gloosy)
Surface Textures	Embossed,smooth,deep wood grain
Installation	Self adhesive



FC-W01



FC-W02



FC-W03



FC-W04



FC-W05



FC-W26



FC-W30



FC-W33



FC-W34



FC-W35



FC-W40



FC-W70

10 years of professional production of PVC floor
Cooperate with us to solve all your needs



Importaciones
Josver